


8" AC CURB

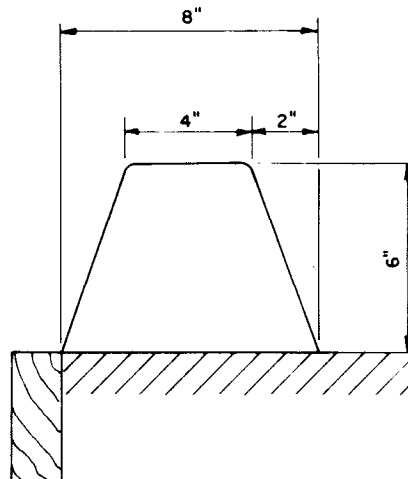

6" AC CURB

NOTES

1. A DIFFERENT CURB CONFIGURATION MAY BE USED, IF APPROVED BY THE ENGINEER.
2. THE ASPHALT CONCRETE MIXTURE SHALL BE CLASS D2-AR 8000 WITH A MINIMUM ASPHALT BINDER OF 5.8 PER CENT IN LIEU OF 4.8 PER CENT AS SHOWN IN SUBSECTION 203-6.3.2.
3. A TACK COAT SHALL BE APPLIED TO THE EXISTING SURFACE. FOR TACK COAT SPECIFICATION, SEE SUBSECTION 302-5.4.
4. THE TEMPERATURE OF THE MIX AT THE TIME OF PLACEMENT SHALL NOT BE LESS THAN 250°F OR MORE THAN 285°F.
5. ALL EXTRUDERS AND SHOES SHALL BE APPROVED BY THE ENGINEER.

BUREAU OF ENGINEERING

DEPARTMENT OF PUBLIC WORKS

CITY OF LOS ANGELES

EXTRUDED ASPHALT CONCRETE (AC) CURB

**STANDARD PLAN
S-412-0**

SUBMITTED *July 18* 1987

James J. Wilson
ENGINEER OF DESIGN
Laurence David
DEPUTY ENGINEER

APPROVED *July 25* 1987

Robert A. Davis
CITY ENGINEER

DESIGNED BY RAB DRAWN BY RGM CHECKED BY RGS



REVISIONS	
NO.	DESCRIPTION

SUPERSEDES	REFERENCES

VAULT INDEX NUMBER B-4103
SHEET 1 OF 1 SHEETS