


SIGNAL STANDARD SCHEDULE					
No.	TYPE	FOUND. TYPE	PED. PUSH BUTN TYPE	PHASE	REMARKS
1	332 Cab	F-332***			ATSAC 2070 Controller in 332 Cabinet
2	Davit*	BSL*			
3	1	F-1			
4	1	F-1			
5	Davit*	CIDH**			7.6m Mast Arm; 19-4-129 Foundation
6	CD954	F-2			
7	Davit*	CIDH**			6.1m Mast Arm; 19-4-129 Foundation
8	Davit*	CIDH**			16.8m Mast Arm; 29-5-129 Foundation
9	1	F-1			
10	1	F-1	0.10	4	
11	26-4-129	CIDH**	0.15	4	12.2m Mast Arm
12	1	F-1			


ESTIMATED SALVAGE MATERIAL TO BE RETURNED TO LADOT	
UNITS	MATERIAL
ALL	LED PEDESTRIAN HEADS
1	ATSAC 170 CONTROLLER IN 332 CABINET

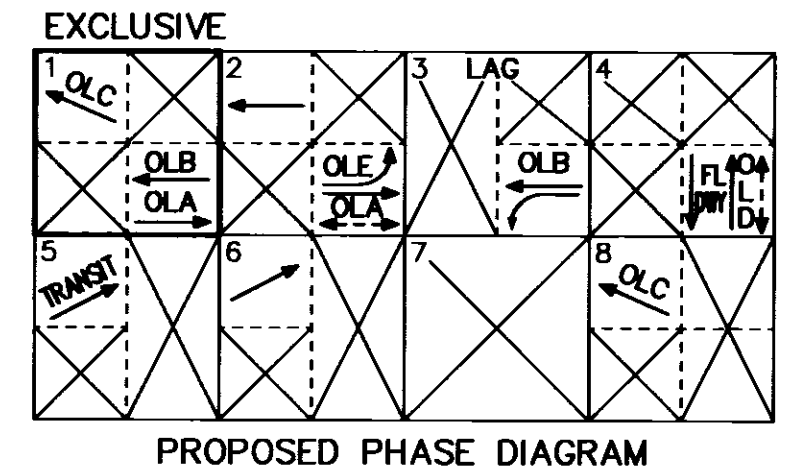

CONDUCTOR SCHEDULE		RUN																							
SIZE No.	CABLE / WIRE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
5	CONDUCTOR CABLE 5 X #14	3																							
9	CONDUCTOR CABLE 8 X #14 & 1 X #12 (COM)																								
12	CONDUCTOR CABLE 11 X #14 & 1 X #12 (COM)	1																							
28	CONDUCTOR CABLE 27 X #14 & 1 X #10 (COM)																								
4	SERVICE																								
14	PED PUSH BUTTON																								
16	DLC (2 PAIR)																								
16	DLC (3 PAIR)																								
16	DLC (4 PAIR)																								
16	DLC (EXISTING)																								
22	INTERCONNECT (12 PAIR)																								
22	INTERCONNECT (25 PAIR)																								
12	BUS DLC (1 PAIR)																								
12	VIDEO FIBER (24 SM)																								
	CONDUIT SIZE (mm)	51	51	51	76	51	51	76	51	51	76	51	51	76	51	51	76	51	51	76	51	51	76	51	51

* For reference only, see Street Lighting Sheet.
 ** Per CALTRANS Standard Plan ES-7F, ES-7G, ES-7M & ES-7N
 *** Existing

* Existing

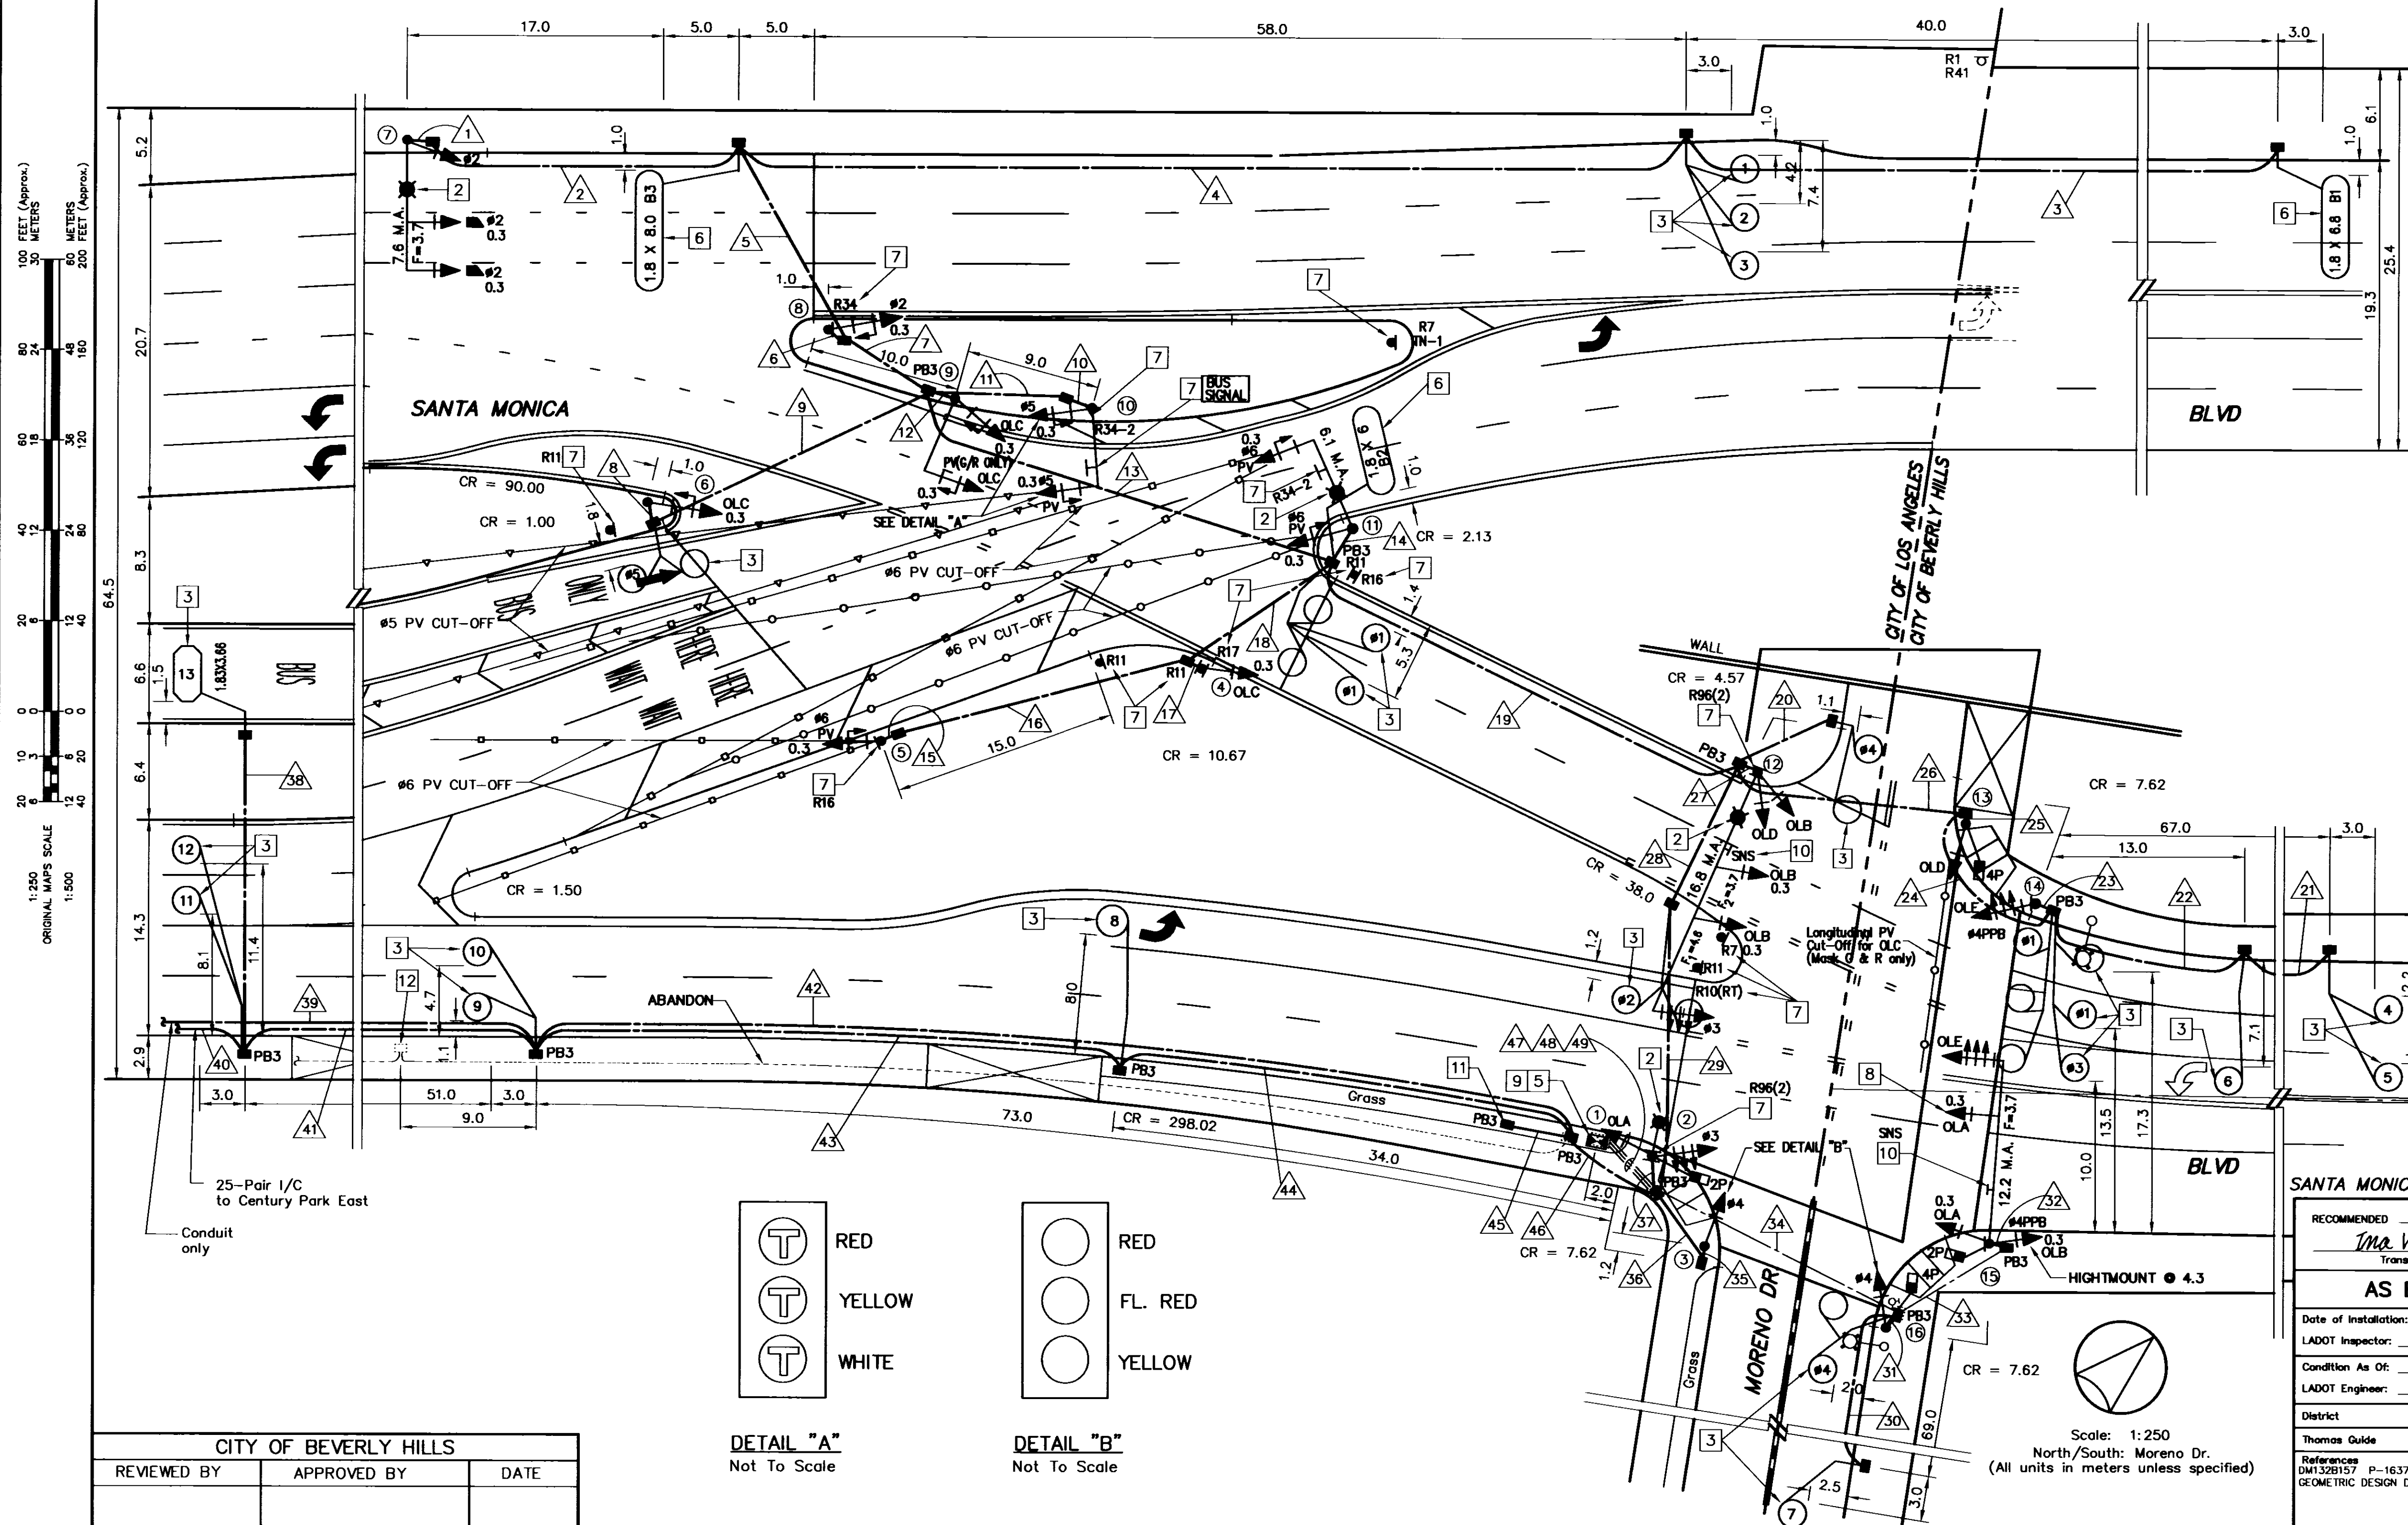

- NOTES:
- SEMI-ACTUATED OPERATION WITH TRANSIT PRIORITY (ATSAC 2070 CONTROLLER IN 332 CABINET)
 - #1 - TIMING ONLY
 - #2 - SANTA MONICA BLVD. (WEST LEG) WB & S/S PED XING
 - #3 - SANTA MONICA BLVD. (EAST LEG) WB & LT
 - #4 - MORENO DR. SB & E/S PED. XING
 - #5 - TRANSIT BUS EB
 - #6 - SANTA MONICA BLVD. (WEST LEG) EB
 - #8 - TIMING ONLY
 - OLA (#1 & #2) - SANTA MONICA BLVD. (EAST LEG) EB
 - OLB (#1 & #3) - SANTA MONICA BLVD. (EAST LEG) WB
 - OLC (#1 & #8) - CONNECTOR RD WB
 - OLD (#4) - MORENO DR. NB
 - WESTWOOD ATSAC SYSTEM
DIRECT WIRE (CABLE) INTERCONNECT
 - SEE STREET LIGHTING SHEET FOR WORK ON STREET LIGHTING FACILITIES.
 - INSTALL LOOPS PER LADOT STD. DWG. NO. S-70.1A
 - INSTALL/REMOVE STRIPING, PAVEMENT MARKINGS AND SIGNS PER LADOT GEOMETRIC DESIGN DWG. NO. A-3166
 - INSTALL 2 TRANSIT PRIORITY SENSOR UNITS IN THE CONTROLLER CABINET PER LADOT STD. NO. S-70.3A
 - INSTALL TRANSIT PRIORITY LOOP PER LADOT STD. NO. S-70.1F.
 - INSTALL SIGNS AS SHOWN.
 - USE STRAP-ON TENON AB-300B, PER LADOT STD. DWG. NO. S-63.1.4 TO MOUNT SIGNAL HEAD ON MAST ARM.
 - THE CONTRACTOR SHALL FURNISH AND INSTALL A NEW CONTROLLER IN CONFORMANCE WITH THE LATEST SPECIFICATIONS AND/OR ADDENDUM FOR THE LADOT ATSAC TYPE 2070 CONTROLLER ASSEMBLY AND 332 CABINET, AND SHALL INCLUDE ALL NECESSARY AUXILIARY EQUIPMENT REQUIRED TO PROVIDE A COMPLETE AND FUNCTIONING CONTROLLER. ALL COMPONENTS AND MATERIALS SHALL BE NEW AND UNUSED. DELIVER THE COMPLETELY ASSEMBLED CONTROLLER AND CABINET FOR TESTING TO LADOT GENERAL SHOP, PIPER TECHNICAL CENTER, 555 RAMIREZ ST. AND THIRTY (30) WORKING DAYS PRIOR TO INSTALLATION.
 - INSTALL LARGE STREET NAME SIGN PER LADOT STD. DWGS NO. S-457.0 & S-486.0.
 - INSTALL SERVICE PULLBOX FOR NEW COMBINATION UNDERGROUND SERVICE (VAULT# 10001) PER LADOT STANDARD DWG. NO. S-79.9. WORK ON ANY ELECTRICAL EQUIPMENT TO BE DONE ONLY IN CONJUNCTION WITH DEPARTMENT OF WATER AND POWER PERSONNEL. CONTACT DWP AT (213) 367-3003 SEVEN (7) WORKING DAYS PRIOR TO INSTALLATION OF THE SERVICE LINE. INSTALL TWO (2) #4 SERVICE WIRES AND A 60 AMP FUSE IN AN IN-LINE WATERPROOF FUSE HOLDER IN SERVICE PULLBOX.
 - ABANDON EXISTING PULLBOX AND REMOVE INTERCONNECT CABLES.

MAINTENANCE COST SHARING :
 CITY OF LOS ANGELES 67%
 CITY OF BEVERLY HILLS 33%

SANTA MONICA BLVD TRANSIT PARKWAY PROJECT - FINAL

RECOMMENDED: *May 23, 2002*
Ma Van Der Laan
 Transportation Engineer

APPROVED: *MAY 23, 2002*
Thomas Lopez
 Senior Transportation Engineer

CITY OF LOS ANGELES
 DEPARTMENT OF TRANSPORTATION
 RITA L. ROBINSON, General Manager

TITLE: **MORENO DR. & SANTA MONICA BLVD.**

District: WESTERN
 Thomas Guide: 632 04

File Name: **17920-NI.DWG** Intersection No: **17920** Project No: **90297**

NOTICE: IF PLAN HAS NOT BEEN IMPLEMENTED WITHIN TWO (2) YEARS OF THE APPROVAL DATE, IT MUST BE RESUBMITTED TO LADOT SIGNAL DESIGN SECTION FOR REVIEW AND APPROVAL.

CITY OF BEVERLY HILLS		
REVIEWED BY	APPROVED BY	DATE

